




**TORTO™**  
**FP7900\*\***  
**Ceiling Fan**

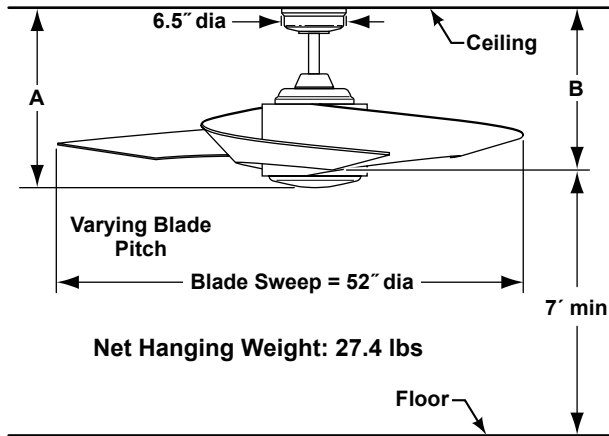

	A	B
Fan w/6" downrod	16.50"	15.00"
Fan w/12" downrod	22.50"	21.00"
Fan w/18" downrod	28.50"	27.00"
Fan w/24" downrod	34.50"	33.00"
Fan w/36" downrod	46.50"	45.00"
Fan w/48" downrod	58.50"	57.00"
Fan w/60" downrod	70.50"	70.00"
Fan w/72" downrod	82.50"	81.00"

Available Finishes	
MG	Metro gray
OB	Oil-rubbed bronze
BL	Black
MW	Matte White

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

172 x 20 motor is designed for optimal performance with this fan.

**BLADE SET:**

A set of three composite blades is included.

**CONTROL OPTIONS:**

TR20WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels, reverse and off button. Optional CWRL4 wall control, CRL4WH and CRL8TS hand-held remote control are available—sold separately. Instructions are provided with each control.

**LIGHTING OPTIONS:**

2-bulb built-in downlight fixture with two 60-watt candelabra bulbs is included. Maximum downlight wattage is not to exceed 120 watts.

**DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional close-to-ceiling kit is available as well—sold separately. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry and damp locations.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	106	4400	76	0.49	58
Med	88	2800	79	0.44	36
Low	66	1700	93	0.34	18